

## MIA-10



### APPLICATIONS

- Nightclubs
- VIP Rooms
- Bar & Lounges
- Live Music Venues

### SPECIFICATIONS

#### Performance

Frequency Range (+/-3dB)	80 Hz – 20 kHz
Horizontal Coverage (-6 dB)	50° to 100°
Vertical Coverage (-6 dB)	55°
Nominal Impedance	8 ohms
Power Handling RMS	500W
Sensitivity 1W @ 1m	99 dB SPL
Maximum Peak SPL at 1m	129 to 132 dB Peak
Recommended Amplifier	EP-13004
Recommended Processor	BSS & Q-Sys

#### Connectors

Audio Input Connector	1 x Neutrik NL4
Audio Output Connector	1 x Neutrik NL4

#### Enclosure

Enclosure Construction	Premium Birch Plywood
Enclosure Geometry	Trapezoidal
Color	Black, White or RAL
Finish	ISO-flex Paint
Dimensions (H x W x D)	(20.28" x 12.44" x 10.91")
Net Weight	31 lbs. (14 kg)

### DESCRIPTION

A high-power system capable of producing 132 dB Peak SPL, the MIA10 Loudspeaker can be safely driven with up to 1000 Watts of amplifier power. The loudspeaker achieves high sound pressure levels and wide bandwidth performance, despite being only half the weight and volume of common trapezoidal loudspeaker systems.

### KEY FEATURES

- 2-WAY Passive Point Source
- 1" compression driver with polymer diaphragm
- Threaded fixing points for wall mounts

# E11EVEN

**SOUND**

## Components

L/F Driver	MIA10-10DR
------------	------------

H/F Driver	MIA10-H/FDR
------------	-------------


## Shipping

Shipping Weight	38 lbs. (17.3 kg)
-----------------	-------------------

## Accessories

MIA10-HMBRK	MIA10 Horizontal Bracket
-------------	--------------------------

## DIMENSIONS

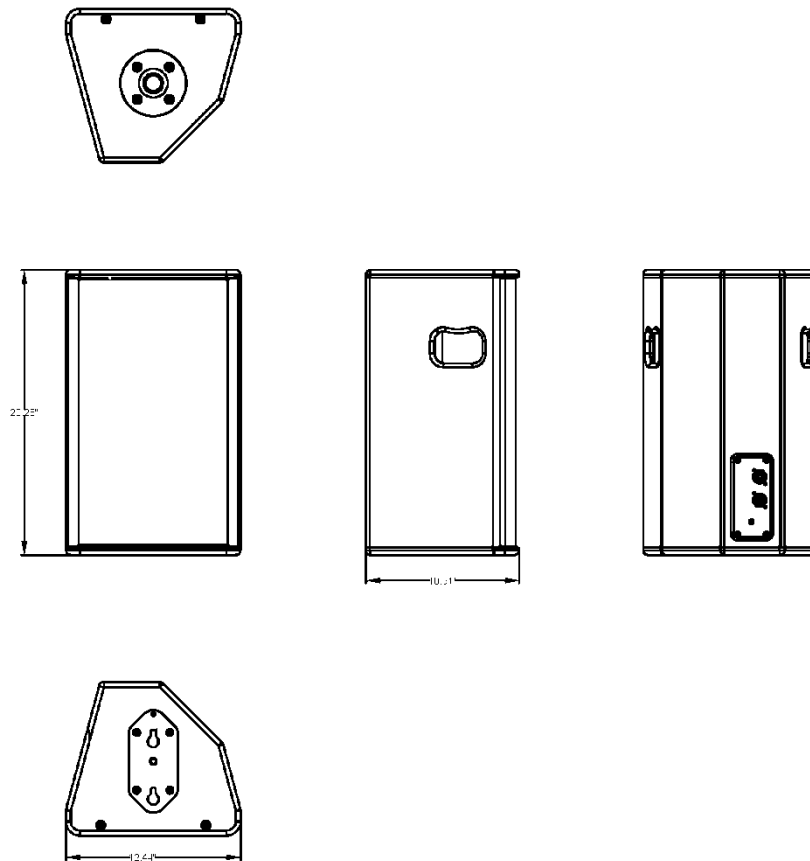

E11EVEN

**SOUND**

E11EVEN Sound Aesthetically is always being improved, along with fly points and mounting hardware. Grills and other cosmetic features subject to change, rendering or photo is for reference purposes only.