

MIA-12



DESCRIPTION

MIA12 fulfils the requirement for a compact system that can deliver high sound levels and should be accompanied by the MIA18 or MIA218 subwoofer. Featuring a 12" (300mm) LF driver unit and a 1" (25mm) exit compression driver on a user-rotatable horn.

KEY FEATURES

- 2-WAY Passive Point Source
- 1" compression driver with polymer diaphragm
- Threaded fixing points for wall mounts

APPLICATIONS

- Nightclubs
- VIP Rooms
- Bar & Lounges
- Live Music Venues

SPECIFICATIONS

Performance

Frequency Range (+/-3dB)	80 Hz – 20 kHz
Horizontal Coverage (-6 dB)	80° (Rotatable)
Vertical Coverage (-6 dB)	50°
Nominal Impedance	8 ohms
Power Handling RMS	550W
Sensitivity 1W @ 1m	99 dB SPL
Maximum Peak SPL at 1m	122 to 128 dB Peak
Recommended Amplifier	EP-13004
Recommended Processor	BSS & Q-Sys

Connectors

Audio Input Connector	1 x Neutrik NL4
Audio Output Connector	1 x Neutrik NL4

Enclosure

Enclosure Construction	Premium Birch Plywood
Enclosure Geometry	Trapezoidal
Color	Black, White or RAL
Finish	ISO-flex Paint
Dimensions (H x W x D)	(22.6" x 14.1" x 13.7")
Net Weight	37.5 lbs. (17 kg)

E11EVEN

SOUND

Components

L/F Driver MIA12-10DR

H/F Driver MIA12-H/FDR


Shipping

Shipping Weight 40.2 lbs. (18.23 kg)

Accessories

Eyebolts

DIMENSIONS

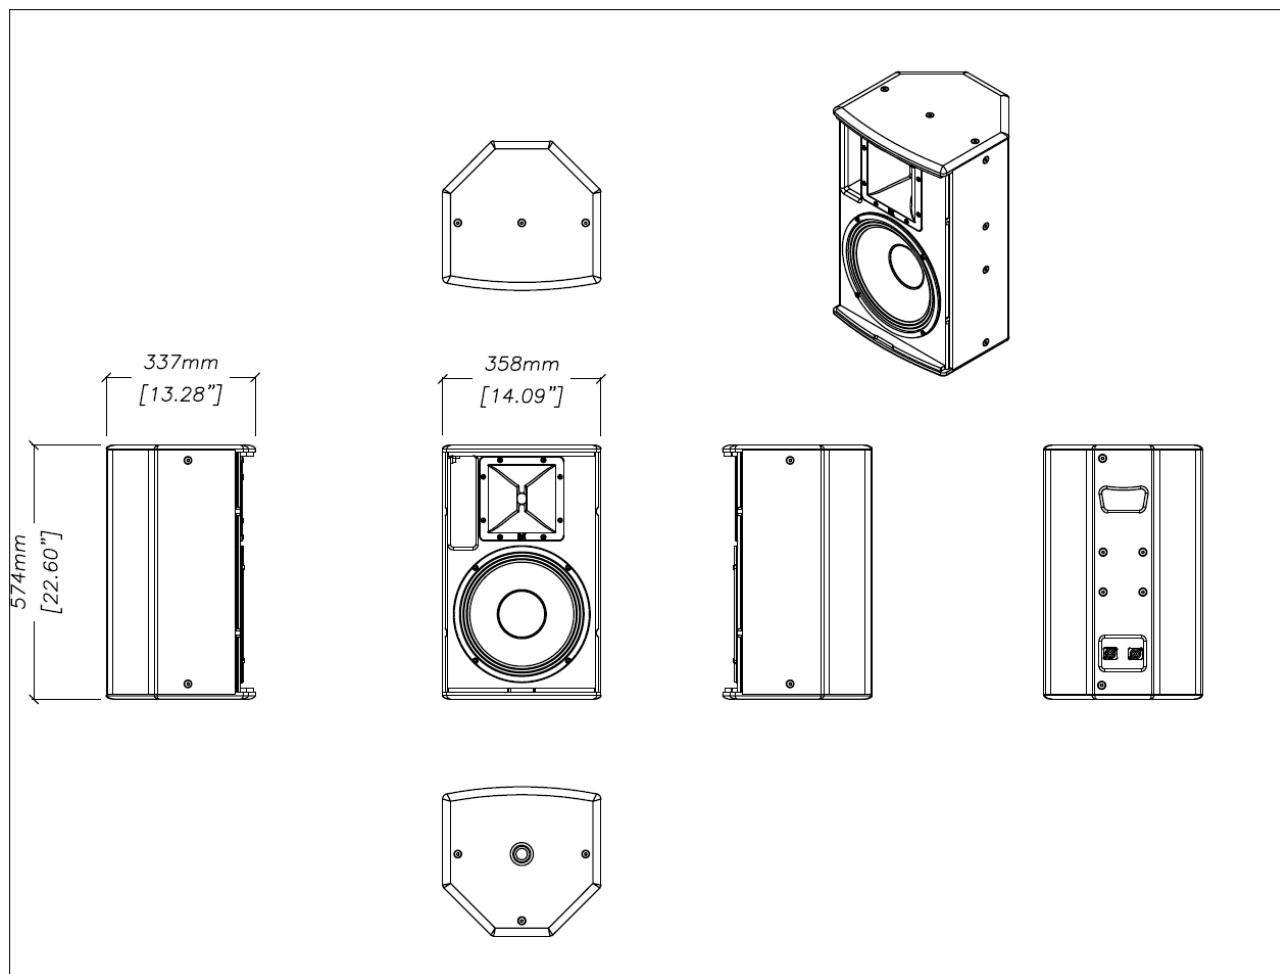

E11EVEN

SOUND

E11EVEN Sound Aesthetically is always being improved, along with fly points and mounting hardware. Grills and other cosmetic features subject to change, rendering or photo is for reference purposes only.