

MIA-DJ8

APPLICATIONS

- Nightclubs
- VIP Rooms
- Bar & Lounges
- Live Music Venues



SPECIFICATIONS

Performance

Frequency Range (+/-3dB)	55 Hz – 20 kHz
--------------------------	----------------

Horizontal Coverage (-6 dB)	TBD 70/90/100/120°
-----------------------------	--------------------

Vertical Coverage (-6 dB)	dependent upon number of elements
---------------------------	-----------------------------------

Nominal Impedance	LF: 16 ohms HF: 16 ohms
-------------------	----------------------------

Power Handling RMS	600W L/F 150W H/F
--------------------	----------------------

Sensitivity 1W @ 1m	99 dB SPL
---------------------	-----------

Maximum Peak SPL at 1m	142 dB Peak
------------------------	-------------

Recommended Amplifier	EP-12X
-----------------------	--------

Recommended Processor	BSS
-----------------------	-----

Connectors

Audio Input Connector	1 x Neutrik NL4
-----------------------	-----------------

Audio Output Connector	1 x Neutrik NL4
------------------------	-----------------

Enclosure

Enclosure Construction	Premium Birch Plywood
------------------------	-----------------------

Enclosure Geometry	Trapezoidal
--------------------	-------------

Color	Black, White or RAL
-------	---------------------

Finish	ISO-flex Paint
--------	----------------

E11EVEN

///SOUND

Dimensions (H x W x D) (9.9" x 28.9" x 18.9")

Net Weight 57 lbs. (26 kg)

Components

L/F Driver MIADJ8-8DR

H/F Driver MIADJ8-H/FDR

Shipping


Shipping Weight 59 lbs. (28.3 kg)

Accessories

MIADJ8 - CABLE MIADJ8 4*4mm*24mm

MIADJ8 – CABLEJ MIADJ8 Jumper cable

DIMENSIONS

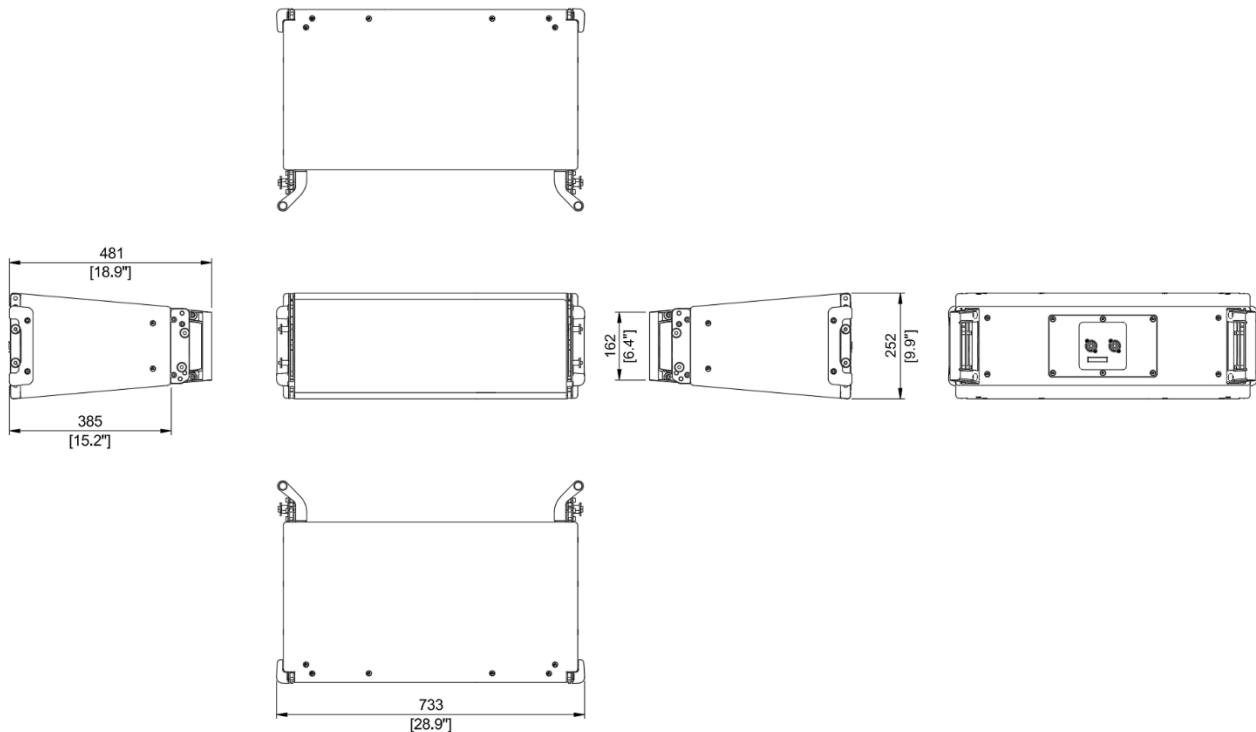

E11EVEN
///SOUND