


E11EVEN

IIISOUND

GIA-208S

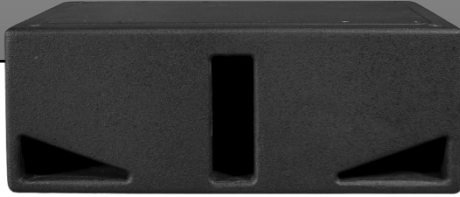

APPLICATIONS

- Houses of worship
- Restaurants
- Bar & Lounges
- Under-stage, in-wall, under-seating and ceiling mount applications.

SPECIFICATIONS

Performance

Frequency Range (+/-3dB) 55 Hz – 400 Hz

Coverage Omnidirectional

Nominal Impedance 4 ohms

Power Handling RMS 400W

Sensitivity 1W @ 1m 95 dB SPL

Maximum Peak SPL at 1m 120 dB

Recommended Amplifier EP-60004

Recommended Processor BSS

Connectors

Input Connection 1: 1 x Neutrik NL4

Input Connection 2: 1 x Neutrik NL4

Enclosure

Enclosure Construction Premium Birch Plywood

Color Black, White or RAL

Finish ISO-flex Paint

Dimensions (H x W x D) (8.25" x 21.75" x 13")

Net Weight 43 lbs.

DESCRIPTION

The ultra-compact GIA208S is a dual 8-inch, no-grille design that can be installed under stages, in walls or ceilings, or in other low-profile locations in either the vertical or horizontal mounting position. The sub is an extremely low-profile enclosure is narrow enough to fit comfortably between wall studs. With a response down to 60 Hz using BSS digital signal processing, the sub can function in pairs as a steered bass array and is equipped with fly points and four rubber feet with recessed foot mounting locations on two sides.

KEY FEATURES

- Low profile design, small footprint
- Under banquette design
- Omnidirectional

E11EVEN

SOUND

Components

L/F Driver

GIA208S-8DR

Shipping

Shipping Weight

79 lbs. (35.5kg)

DIMENSIONS

