

E11EVEN

SOUND

EP-12X



DESCRIPTION

The E11EVEN power amplifier series are designed for the utmost clarity, dependability and will deliver under extreme usage. They have been meticulously designed with additional protection such as input sensitivity, voltage limiting and a hard or soft knee compressor. The E11EVEN power amplifiers are built with additional fans, cooling fins and protection to ensure they perform flawless under extreme conditions along with a 3-year limited warranty. This amplifier is to be used exclusively with MIADJ8 & MIADJ18 Sub. Includes pre-installed presets with cross-over settings for those two E11EVEN Series products only. For optimum performance BSS or Q-Sys processing is recommended for DJ performance.

KEY FEATURES

- 4 channel high power amplifier
- Thermal and current protection
- Integrated DSP
- Flexible 4x4 routing matrix
- Universal Switched Mode Power Supply
- Short-circuit protection
- Class D

SPECIFICATIONS

Amplification & Power Supply

Output Power Ratings	4 x 3250 W @ 2.7 ohms
	4 x 2550 W @ 4 ohms
	4 x 1400 W @ 8 ohms

Power Supply model	Universal Switched Mode
Mains rating	100 V – 240 V 50-60 Hz

Inputs

AVB	4 Ch 1 stream (8 CH total)
AES/EBU	4 Ch AES/EBU (2 x AES3)
Analog	4 Channels
Connectors	2 etherCON 1 Gb/s 4 female 3-pin XLR 4 male 3-pin XLR link

Outputs

Speaker connections	2 x 4-point speakON 1 x 8-point CA-COM
---------------------	---

Enclosure

Height	2U
Weight	32 lb/14.5 kg
Protection rating	IP20
Temperature	0 °C/32 °F to + 50 °C/ 122 °F
Display indicators	LCD and LED's
Navigation	Rotary encoder, power & mute keys

E11EVEN

SOUND

Circuit Protection


Mains and power supply

Over and Under voltage / over temperature / over current

Power outputs

Over Current / DC / short circuit / rail over and under voltage /
overtemperature

DIMENSIONS

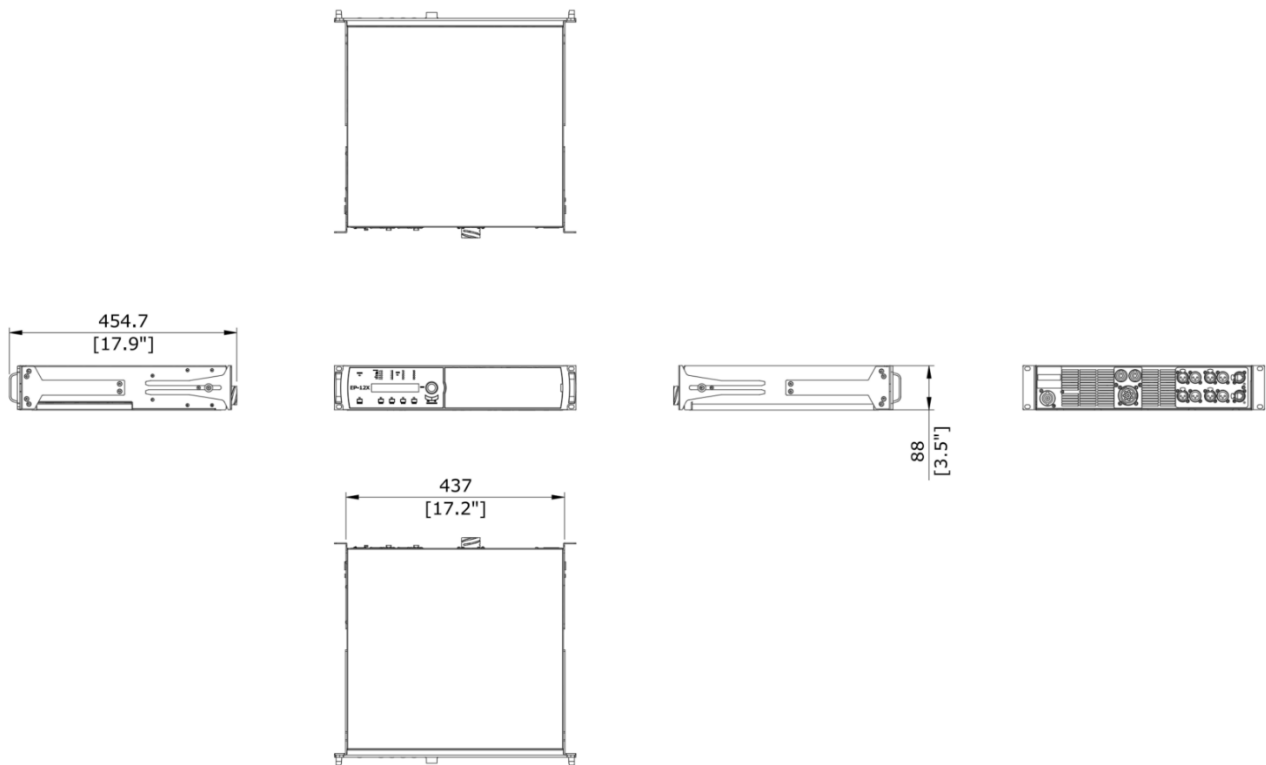

E11EVEN

SOUND

E11EVEN Sound Aesthetically is always being improved, along with fly points and mounting hardware. Grills and other cosmetic features subject to change, rendering or photo is for reference purposes only.